


HYUNDAI SONATA 2009


- 1 Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2 Remove shifter knob from stem. (Figure A)
- 3 Unclip and remove the shifter trim panel. (Figure B)
- 4 Unclip and remove the (2) side trim panels from the center console area. (Figure C)

Continued on page 2.


A

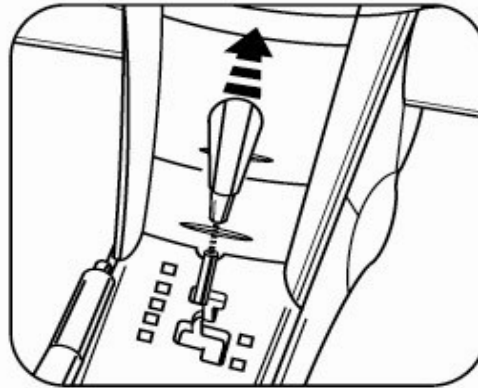

B

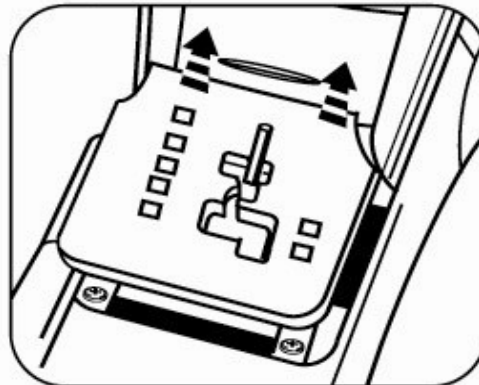

C

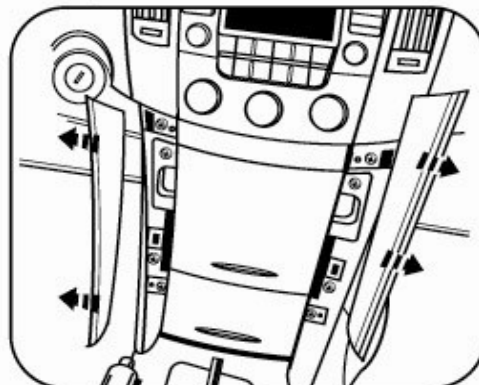

www.1999.gr

HYUNDAI SONATA 2009

5 Remove (2) Phillips screws then unclip and remove the small trim panel below the factory climate controls and above the pocket. (Figure D,E)

6 Unclip and remove the trim panel surrounding the radio and including the climate controls and vents. (Figure F)

7 Remove (4) Phillips screws securing the radio. Unplug and remove the radio. (Figure G)

Continue to kit assembly.

